


# PONTE GIULIO®

PONTE Giulio USA, Inc  
W241 S4021 Rockwood Circle Waukesha, WI 53189 – USA  
Phone + 1.877.766.8301 • fax + 1.877.766.8306  
Web Site: [www.pontegiuliousa.com](http://www.pontegiuliousa.com); Email: [pontegiulio@sbcglobal.net](mailto:pontegiulio@sbcglobal.net)


Code	<b>G02JASxx04.</b>
Date	13.11.2010
Revised	A 21.2.2011

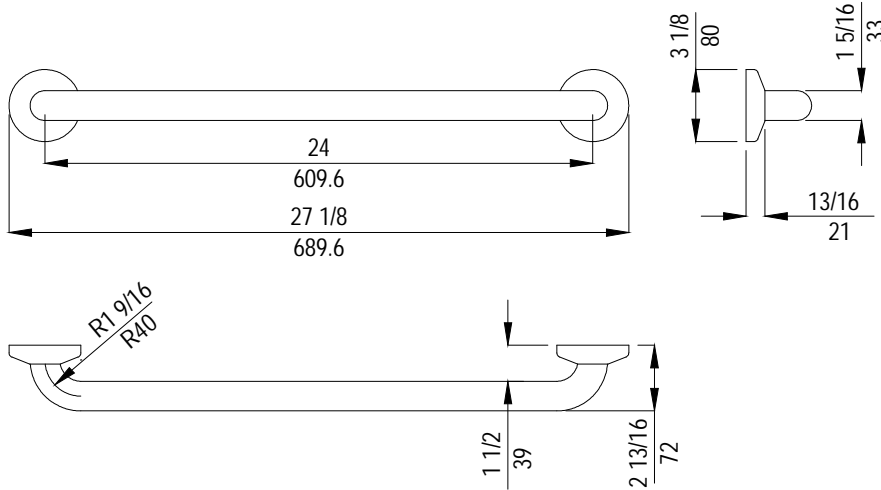

## STRAIGHT GRAB BAR 24" MAXIMA Line

SECTION 10810

TOILET ACCESSORIES

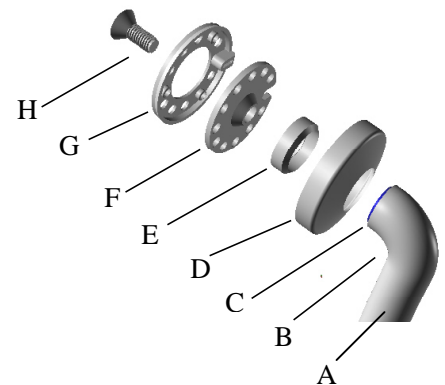

### MANUFACTURERS

- Acceptable Manufacturer: Ponte Giulio, which is located at: W241 S4021 Rockwood Circle ; Waukesha, WI 53189; Toll Free Tel: 877-766-8301; Email: [pontegiulio@sbcglobal.net](mailto:pontegiulio@sbcglobal.net); Web: [www.pontegiuliousa.com](http://www.pontegiuliousa.com)
- Requests for substitutions will be considered in accordance with provisions of Section 01600.
- Substitutions: not permitted

### SPECIFICATION

- A. Diameter: 1-5/16 inches (33mm). No junction between the straight – Product come already assembled  
Electrically insulated – Self-extinguishing – Biocompatible - Non slip – Soft and warm to the touch  
Clear Space to Wall: 1-1/2 inches (39mm)  
Color: W1=White, I2=Biscuit, I1= Ivory, D2=Grey, B2=Light Blue, G2= Light Green, Y1=Yellow, G1=Green, R1=Red, P4=Prune, D4=Dark grey, B1=Blue, D1=Black  
Environmental Impact/Weight: Recycled Content= 79.9%, Recyclable=98.8%
- B. Extruded Plastic Finish Coating: Antibacterial BioCote®, 1/8 inch (3mm) thick
- C. Cores: Corrosion resistant, zinc coated steel core, Diameter: 1-1/16 Inches (26.4mm), Thickness: 1/16 inches (2.3mm)
- D. Flange Cover: Snap-on design, polyamide Antibacterial BioCote® construction, Diameter : 3-3/16 inches (81mm)  
Thickness : 1/16 inch (2mm)
- E. End Cap: Polyamide Antibacterial BioCote® construction;
- F. Flange: stainless steel AISI304, Diameter 2-3/4 inches (70mm), Thickness 5/32 inches (4mm)
- G. Concealing steel: Polyamide construction
- H. Screw: Stainless Steel M12x30

### EXAMINATION

- Do not begin installation until substrate and finishing operations have been completed, including painting. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation and do not proceed with installation.
- Verify that prepared openings are sized and located in accordance with approved submittals. Verify that blocking, reinforcement and anchoring devices are correct type and are located in accordance with shop drawings.
- Verify that surfaces are dry and free of dirt, grease and loose paint.

### INSTALLATION

- Install toilet accessories in accordance with shop drawings and manufacturer's printed installation instructions, plumb and level.
- Install all bathroom accessories such that they are rigidly anchored to substrate.
- Locate toilet accessories at heights indicated on the Drawings, in compliance with the Americans with Disabilities Act where applicable.

### CLEANING

- Before substantial completion, clean surfaces in accordance with manufacturer's printed maintenance instructions included in product data sheets.

### PROTECTION OF INSTALLED PRODUCTS

- Protect installed products from damage caused by subsequent construction activities until the end of construction.
- Remove and replace units which are loose, broken or have damaged finishes. Field repair of damaged product finishes is prohibited.

### DELIVERY, STORAGE, AND HANDLING

- Deliver materials to jobsite in unopened factory packaging. Inspect materials at delivery to assure that specified products have been received.
- Store products in manufacturer's packaging in a climate controlled location.

### QUALITY ASSURANCE

- Manufacturer Qualifications: Minimum five years documented experience producing products specified.
- Accessibility: Products shall comply with ADAAG requirements where specified.

### WARRANTY

- Provide manufacturer's standard limited warranty against defects in manufacturing and materials.