

Y96SES56XX Range Standard

Structurally engineered wall anchor fit for the installation of grab rails. Uses two 8-32 Stainless Steel screws. Eliminates the need for structural blocking, never loosens and rated up to 450 pounds. A hole of 19 mm diameter is required for installation. Designed for 50x76 or larger hollow walls and wall substrates from 6 to 19 mm thick.

Physical data


Dimensions (mm.)

Weight (kg.)

Delivery methods

Package dimensions (mm.)

Weight with Packaging (kg.)

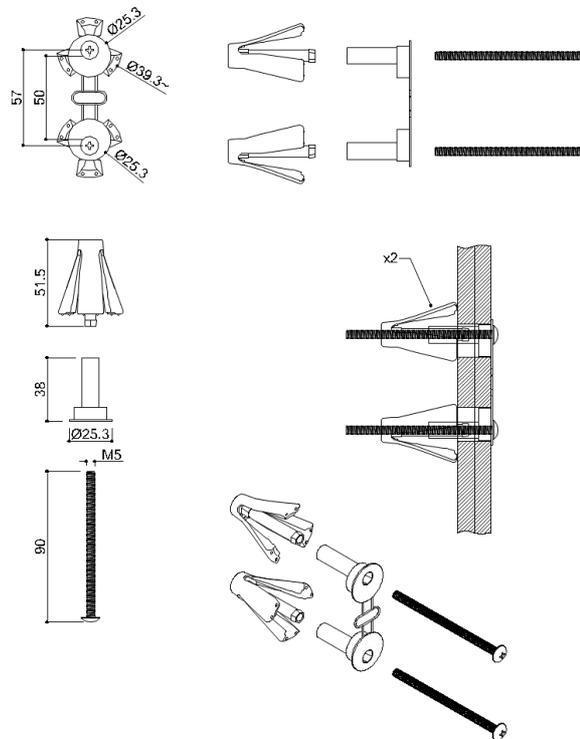

Y96SES56XX *Range* Standard

Materials and finishes

Engineering polymers	Polished
Stainless steel	N/A

Safety tips

Before installing and using the device, read the instructions for use and especially the safety warnings carefully and follow them.
If in doubt, contact the company before using the device.

Information on use

The device is not affected by the room's temperature, though it must NOT be installed in environments subject to temperatures below 4°C or above 40°C.

Do not install in saunas. Not comply with the indicated temperatures may damage the plastic coating of the device.

Warranty

If this product fails due to a defect in material or workmanship during the time of periods listed below for each product, Ponte Giulio will replace or repair it free of charge. .

Warranty 2 YEARS