

Y96SES56XX Series Standard

Structurally engineered wall anchor fit for the installation of grab rails. Uses two 8-32 Stainless Steel screws. Eliminates the need for structural blocking,never loosens and rated up to 450 pounds. A hole of 19 mm diameter is required for installation. Designed for 50x76 or larger hollow walls and wall substrates from 6 to 19 mm.thick.


Product Data

Overall Dimensions (Inch.) Net Weight (lbs.)

Packaging Details

Package dimensions (Inch.)
Weight with Packaging (lbs.)



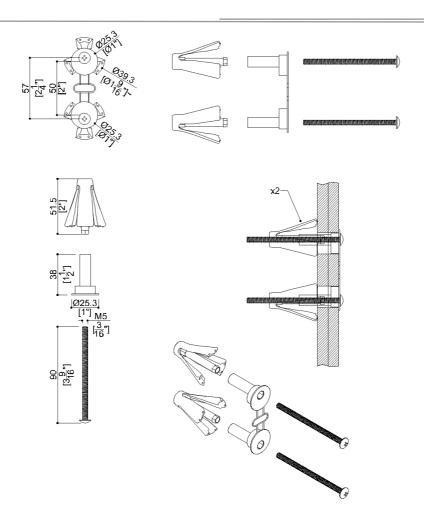



Y96SES56xx Series Standard

Materials and finishes	
Engineering polymers	Polished
Stainless Steel	N/A.

Vertical 551 lbs. Horizontal 551 lbs.

Warning

Before installation and use, read the installation and use instructions in their entirety. If questions arise please contact Ponte Giulio company.

Cleaning

The device is not affected by the room's temperature, though it must NOT be installed in environments subject to temperatures below 4°C or above 40°C .

Do not install in saunas. Not comply with the indicated temperatures may damage the plastic coating of the device.

Warranty

Please visit www.pontegiulio.com for complete warranty details.