

F18XOS03XX Series Solo

Shower rod - \varnothing 20 mm. - With cylindrical supports for wall anchorage adjustable on length. Article equipped with anti-twist hose - 1500 mm. -, 5-function hand shower and sliding with easy-action lever.

Product Data


Overall Dimensions (Inch.)	2-13/16x3-9/16x27-11/16
Net Weight (lbs.)	3.64

Installation Hardware Details

Stainless steel screw and dowels

Packaging Details

Package	Cardboard package
Package dimensions (Inch.)	28-5/16 x 6-11/16 x 2-13/16
Weight with Packaging (lbs.)	4.03

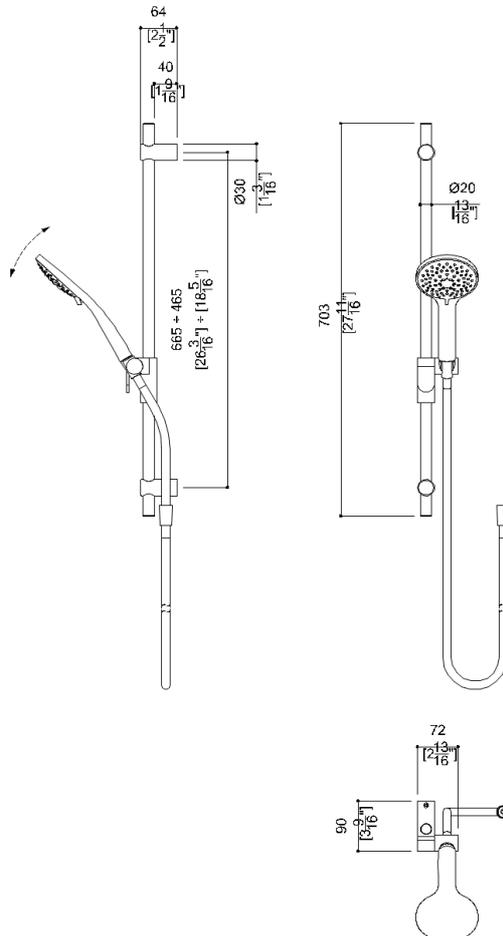

F18XOS03XX *Series Solo*

Available Finishes (xx)

Rail



Other elements



Materials and finishes

Stainless Steel Polished

Installation

Ponte Giulio suggests the product must be installed by a professional operator, which is capable to verify the characteristics of the support to which the item must be installed.

Load Capacity

Vertical	250 lbs.	Horizontal	250 lbs.
----------	----------	------------	----------

Warning

- Prior to installing and using the device, carefully read the instructions for use and – in particular – the safety precautions, and comply with them. Store this manual for reference for the entire life-cycle of the device.
- Should this manual get damaged, or if certain sections are difficult to understand, prior to using the device contact the company at the address indicated on the last page.
- Any changes to the information provided in the instruction manual – if deemed important for the user's safety – shall be announced through the Ponte Giulio Internet website and notified to all authorised dealers.

Cleaning

- The device is not affected by the room's temperature, though it must not be installed in locations subject to temperatures below 39°F (4°C) or above 104°F (40°C).
- Do not install in saunas.

Warranty

Shower Curtain Rails: Lifetime

For full warranty information, please visit www.pontegiulio.com