

F18XOS05xx *Series* Solo


Shower rod - \varnothing 20 mm. - With cylindrical supports for wall anchorage adjustable on length. Article equipped with anti-twist hose - 1500 mm. -, 5-function hand shower and slide with easy-action lever

Product Data

Overall Dimensions (Inch.)	2-15/16x3-3/4x35-11/16
Net Weight (lbs.)	2.2

Packaging Details

Package	Cardboard package
Package dimensions (Inch.)	36 x 6-11/16 x 2-13/16
Weight with Packaging (lbs.)	2.69

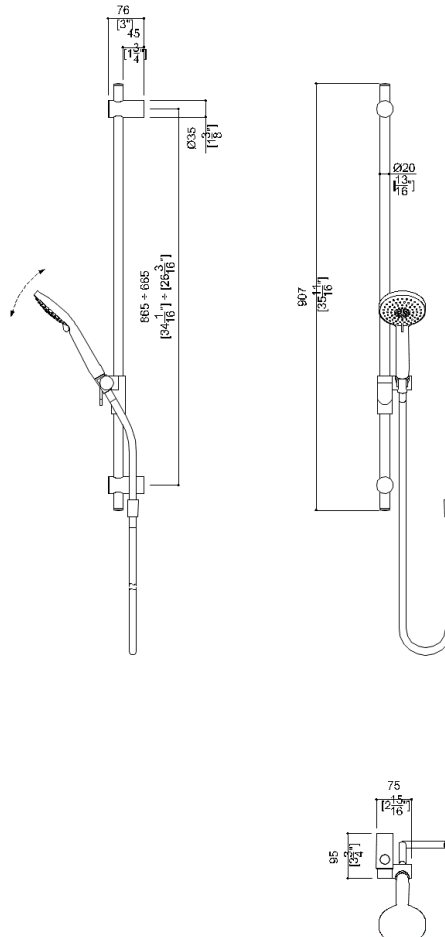

F18XOS05XX

Series Solo

Available Finishes (xx)

DM
Black Matte

Materials and finishes

Stainless Steel	Matt
ABS	Matt

Installation

Ponte Giulio suggests the product must be installed by a professional operator, wich is capable to verify the characteristics of the support to which the item must be installed.

Load Capacity

Vertical	220 lbs.	Horizontal	110 lbs.
----------	----------	------------	----------

Warning

- Prior to installing and using the device, carefully read the instructions for use and – in particular – the safety precautions, and comply with them. Store this manual for reference for the entire life-cycle of the device.
- Should this manual get damaged, or if certain sections are difficult to understand, prior to using the device contact the company at the address indicated on the last page.
- Any changes to the information provided in the instruction manual – if deemed important for the user's safety – shall be announced through the Ponte Giulio Internet website and notified to all authorised dealers.

Cleaning

- The device is not affected by the room's temperature, though it must not be installed in locations subject to temperatures below 39°F (4°C) or above 104°F (40°C).
- Do not install in saunas.

Warranty

Shower Curtain Rails: Lifetime

For full warranty information, please visit Please visit www.pontegiulio.com