


G02JAS08xx Series Maxima

42" straight grab bar, zinc-plated steel pipe, coated with 3mm anti-microbial vinyl, 11-hole concealed mounting flange.

Mounting hardware supplied for wood stud installation.

| Product Data | |
|-------------------------------|----------------------------|
| Overall Dimensions (Inch.) | 45-1/4x2-7/8x3-1/8 |
| Net Weight (lbs.) | 4.94 |
| Installation Hardware Details | |
| Stainless steel screw | TSP 5x60 Inox |
| Packaging Details | |
| Package | LDPE bag in cardboard box |
| Package dimensions (Inch.) | 45-11/16 x 3-1/2 x 3-11/16 |
| Weight with Packaging (lbs.) | 5.6 |



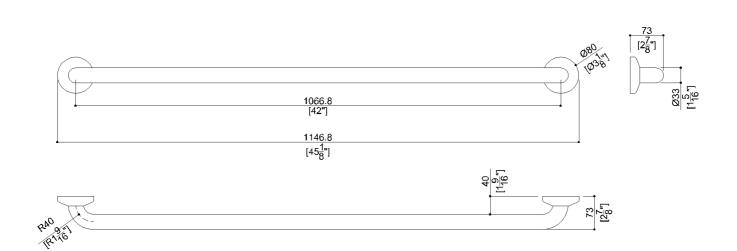




G02JAS08xx Series Maxima

Y88JKS12

AISI 304 stainless steel fixing plate

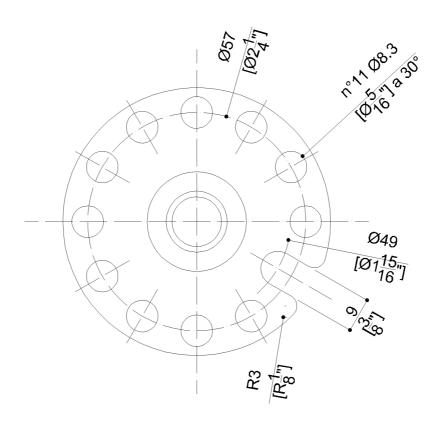

Available Finishes (xx)

| B1 | Blue | B2 | Light blue | D1 | Black |
|----|-------------|----|------------|----|--------------|
| D2 | Greystone | D4 | Dark Gray | G1 | Green |
| G2 | Light Green | I1 | lvory | 12 | Biscuit |
| P4 | Prune | R1 | Vivid Red | R7 | Ruby red |
| W1 | White | Y1 | Yellow Sun | Y3 | Light Yellow |

Materials and finishes

| Steel | Rough |
|-----------------|----------|
| Stainless Steel | Rough |
| Polyamide | Polished |
| Vinyl | Polished |

Load Capacity

Vertical 331 lbs.

Warning

Before installation and use, read the installation and use instructions in their entirety. If questions arise please contact Ponte Giulio company.

Cleaning

The device is not affected by the room's temperature, though it must NOT be installed in environments subject to temperatures below 4°C or above 40°C.

Do not install in saunas. Not comply with the indicated temperatures may damage the plastic coating of the device.

Warrant

Please visit www.pontegiulio.com for complete warranty details.