

G25JBS01XX Series Pro Series

Antimicrobial vinyl coated 2-wall corner grab bar. No maintenance 3mm thick antimicrobial vinyl coating. Concealed ABS 4-hole flange plate.

Mounting hardware supplied for wood stud installation.

Product Data


| | |
|----------------------------|-----------------------|
| Overall Dimensions (Inch.) | 27-9/16x25-9/16x3-1/8 |
| Net Weight (lbs.) | 6.26 |

Installation Hardware Details

| | |
|-----------------------|---------------|
| Stainless steel screw | TSP 5x60 Inox |
|-----------------------|---------------|

Packaging Details


| | |
|------------------------------|---------------------------|
| Package | LDPE bag in cardboard box |
| Package dimensions (Inch.) | 29-1/2 x 9-1/8 x 1-13/16 |
| Weight with Packaging (lbs.) | 7.05 |

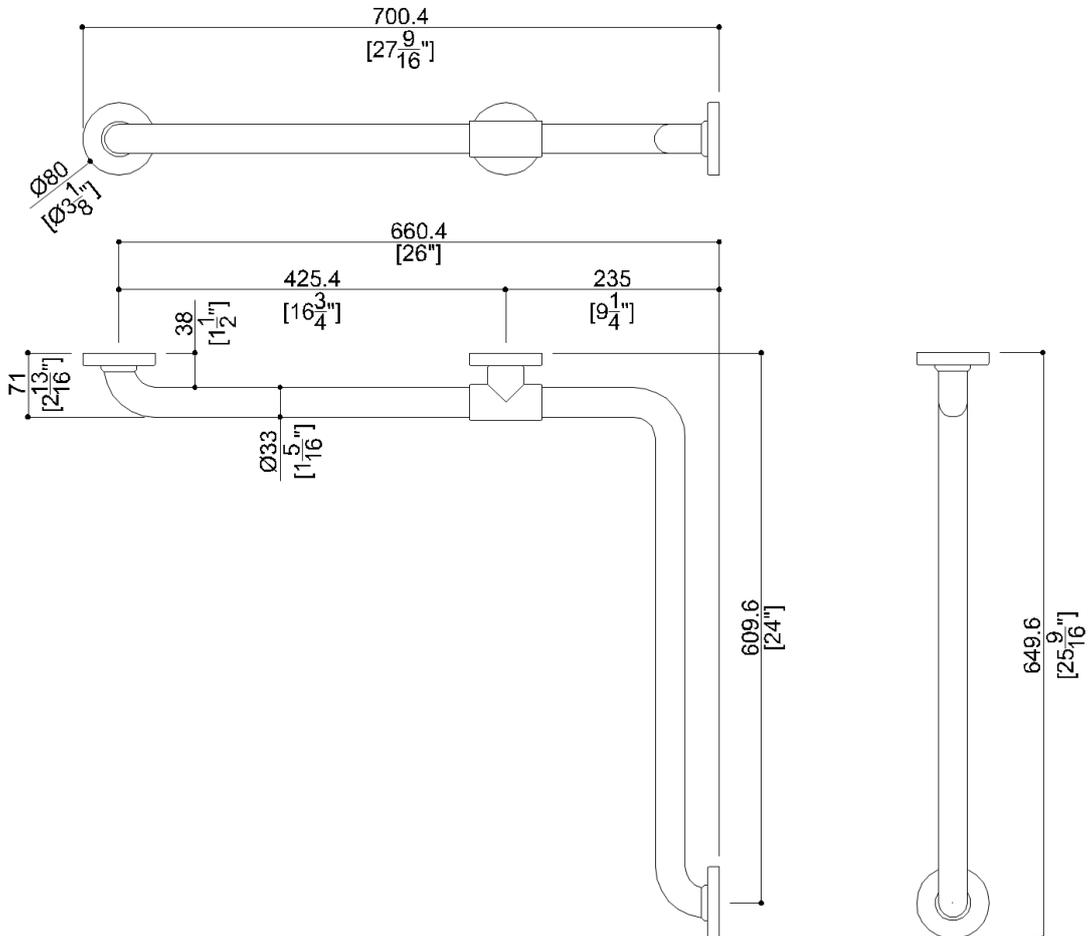

G25JBS01XX Series Pro Series

Y87JKS01

Fixing plate

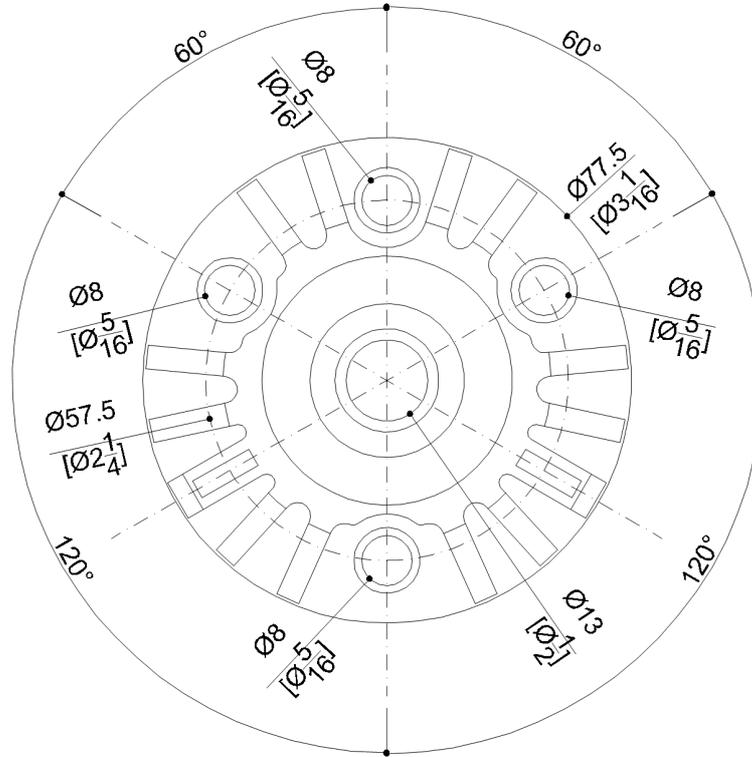

Available Finishes (xx)

| | | |
|------------------------|-------------------------|--------------------------|
| B1 Blue | B2 Light blue | D1 Black |
| D2 Greystone | G1 Green | G2 Light Green |
| I1 Ivory | I2 Biscuit | R1 Vivid Red |
| W1 White | Y1 Yellow Sun | |

Load Capacity

Vertical 450 lbs.

Warning

Before installation and use, read the installation and use instructions in their entirety. If questions arise please contact Ponte Giulio company.

Cleaning

The device is not affected by the room's temperature, though it must NOT be installed in environments subject to temperatures below 4°C or above 40°C .
Do not install in saunas. Not comply with the indicated temperatures may damage the plastic coating of the device.

Warranty

Please visit www.pontegiulio.com for complete warranty details.

Materials and finishes

| | |
|-----------|------------|
| Vinyl | Polished |
| Polyamide | Polished |
| Steel | Galvanised |