

G27JAL14XX Series Vinyl coated

Two wall transition grab bar, left hand version. No maintenance 3mm thick antimicrobial vinyl coating. Concealed stainless steel 11-hole flange plate.

Mounting hardware supplied for wood stud installation.

Р	ro	dυ	ıct	D	ata

Overall Dimensions (Inch.)	7-3/8x7-3/8x33-3/8		
Net Weight (lbs.)	5.07		


Installation Hardware Details


Stainless steel screw	TSP 5x60 Inox
Otali licoo oteel oolew	1 OI OXOO IIIOX

Packaging Details

Package	LDPE bag in cardboard box		
Package dimensions (Inch.)	7-11/16 x 3-11/16 x 35-3/16		
Weight with Packaging (lbs.)	5.95		



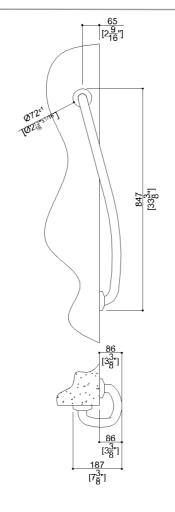

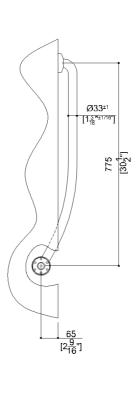




G27JAL14XX Series Vinyl coated

Y88JKS24

AISI304 stainless steel fixing plate

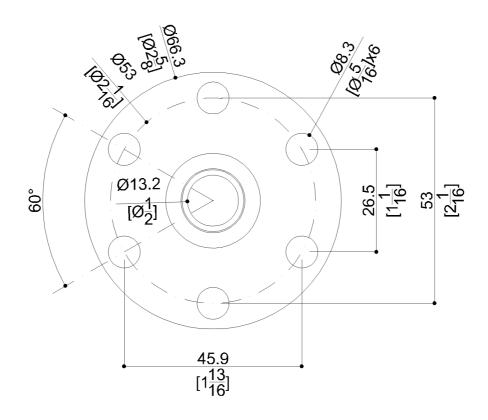

Available Finishes (xx)

B1	Blue	B2	Light blue	D1	Black
D2	Greystone	D4	Dark Gray	G1	Green
G2	Light Green	I1	Ivory	12	Biscuit
P4	Prune	R1	Vivid Red	R7	Ruby red
W1	White	Y1	Yellow Sun	Y3	Light Yellow

Materials and finishes

Steel	N/A.
Polyamide	Polished

Load Capacity

Vertical	331 lbs.	Horizontal	331 lbs.

Warning

Before installation and use, read the installation and use instructions in their entirety. If questions arise please contact Ponte Giulio company.

Cleaning

The device is not affected by the room's temperature, though it must NOT be installed in environments subject to temperatures below 4°C or above 40°C .

Do not install in saunas. Not comply with the indicated temperatures may damage the plastic coating of the device.

Warrant

Please visit www.pontegiulio.com for complete warranty details.

Vinyl