

G40JAS34XX Series Vinyl coated

24" Straight grab bar with fixed flange. No maintenance 3mm thick antimicrobial vinyl coating. Concealed stainless steel 11-hole flange plate.

Mounting hardware supplied for wood stud installation.

Product Data

Overall Dimensions (Inch.) 25-1/4x4-15/16x3-1/4

Net Weight (lbs.) 4.41

Installation Hardware Details

Stainless steel screw and dowels Fischer SX 8 6x70 Inox


Packaging Details


Package LDPE bag in cardboard box

Package dimensions (Inch.) 25-13/16 x 8-1/8 x 4-5/16

Weight with Packaging (lbs.) 5.07



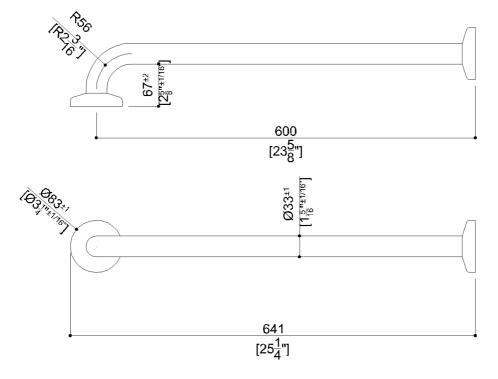






G40JAS34XX Series Vinyl coated

Y88JKS12

AISI 304 stainless steel fixing plate

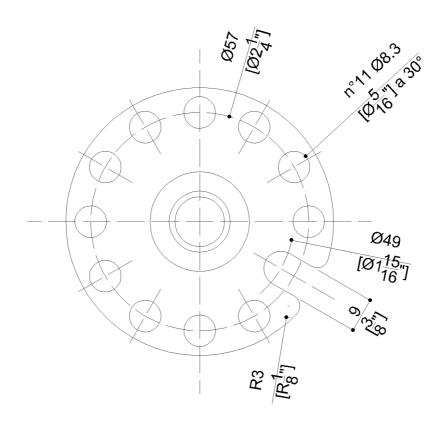

Available Finishes (xx)

B1 E	Blue	B2	Light blue	D1	Black
D2	Greystone	D4	Dark Gray	G1	Green
G2 L	ight Green	I1	Ivory	12	Biscuit
P4	Prune	R1	Vivid Red	R7	Ruby red
W1	Vhite	Y1	Yellow Sun	Y3	Light Yellow

Materials and finishes

Steel	Rough
Stainless Steel	Rough
Polyamide	Polished
Vinyl	Polished

Load Capacity

Vertical	331 lbs.	Horizontal	88 lbs.

Warning

Before installation and use, read the installation and use instructions in their entirety. If questions arise please contact Ponte Giulio company.

Cleaning

The device is not affected by the room's temperature, though it must NOT be installed in environments subject to temperatures below 4°C or above 40°C.

Do not install in saunas. Not comply with the indicated temperatures may damage the plastic coating of the device.

Warranty

Please visit www.pontegiulio.com for complete warranty details.